

Vaisala HUMICAP® Humidity and Temperature Probe HMP110



The HMP110 with excellent stability and high chemical tolerance.

Features/Benefits

- Miniature-size humidity transmitter
- Low power consumption and fast start-up for battery powered applications
- Measurement range: 0 ... 100 %RH; -40 ... +80°C
- Cable detachable with standard M8 quick connector
- Reliable: Latest generation HUMICAP® 180R sensor for best stability and high chemical tolerance. IP65 metal housing.
- Optional RS485 digital output
- Traceable: Comes with calibration certificate. ± 1.5 %RH measurement accuracy (0 ... 90 %RH)
- HMP110R replacement probe service available for easy maintenance
- Optional dew point calculation

The HMP110 is a trouble-free and cost-effective humidity transmitter with high accuracy and good stability. It is suitable for volume applications or integration into other manufacturers' equipment. The HMP110 is also suitable for glove boxes, greenhouses, fermentation and stability chambers, data loggers, and incubators.

Easy Installation

The probe cable has a screw-on quick connector for easy installation. Different cable lengths and accessories are available.

Low Current Consumption

HMP110 is suitable for battery-powered applications because of its very low current consumption. It also has a fast start-up time.

Several Outputs

The temperature measurement is a standard feature, dew point measurement is optional. Three standard voltage outputs are available.

Robust Design

The stainless steel body of the HMP110 is classified as IP65. Thus, it survives rough conditions. The HMP110 has high chemical tolerance because of the HUMICAP® 180R sensor.

Easy Maintenance

Maintaining measurement traceability is easy using the HMP110R replacement probe. We send you a replacement probe, you detach the old probe and send it back to us. In this way the measurement is available at all times without interruptions.

Technical Data

Performance

RELATIVE HUMIDITY

Measurement range	0 ... 100 %RH
Accuracy (incl. non-linearity, hysteresis and repeatability)	
temperature range	0 ... +40 °C
0 ... 90 %RH	±1.5 %RH
90 ... 100 %RH	±2.5 %RH
temperature range	-40 ... 0 °C, +40 ... +80 °C
0 ... 90 %RH	±3.0 %RH
90 ... 100 %RH	±4.0 %RH

Factory calibration uncertainty (+20 °C)

0 ... 90 %RH	±1.1 %RH
90 ... 100 %RH	±1.8 %RH

Humidity sensor	Vaisala HUMICAP® 180R
Stability	±2 %RH over 2 years

TEMPERATURE

Measurement range	-40 ... +80 °C
Accuracy over temperature range	
0 ... +40 °C,	±0.2 °C
-40 ... 0 °C, +40 ... +80 °C	±0.4 °C
Temperature sensor	Pt1000 RTD Class F0.1 IEC 60751

DEW POINT

Measurement range	-40 ... +80 °C
Accuracy (incl. non-linearity, hysteresis and repeatability)	
temperature range	0 ... +40 °C
when dew point depression < 15 °C	±1 °C
when dew point depression 15 ... 25 °C	±2 °C
temperature range	-40 ... 0 °C, +40 ... +80 °C
when dew point depression < 15 °C - dew point depression = ambient temperature - dew point	±2 °C

Inputs and Outputs

Operating voltage	5 ... 28 VDC / 8 ... 28 VDC with
(Use lowest available operating voltage to minimize heating)	5 V output
	8 ... 28 VDC with loop power converter

Current consumption	1 mA average, max. peak 5 mA
---------------------	------------------------------

Start-up time	
probes with analog output	4 s at operating voltage
	13.5 ... 16.5 VDC
	2 s at other valid operating voltages

probes with digital output	1 s
----------------------------	-----

Outputs

2 channels	0 ... 1 VDC / 0 ... 2.5 VDC / 0 ... 5 VDC / 1 ... 5 VDC
1-channel loop-power converter (separate module, compatible with humidity accuracy only)	4 ... 20 mA
digital output (optional)	RS485 2-wire half duplex

External loads

0 ... 1 V	R _L min 10 kΩ
0 ... 2.5 V / 0 ... 5 V	R _L min 50 kΩ

Operating Environment

Operating temperature range	-40 ... +80 °C
Electromagnetic compatibility	EN 61326-1: Electrical equipment for measurement, control and laboratory use – EMC requirements – for use in industrial locations.

Mechanics

Materials

body	stainless steel (AISI 316)
grid filter	chrome coated ABS plastic
cable	polyurethane or FEP

Housing classification	IP65
------------------------	------

Body thread	M12x1 / 10 mm
-------------	---------------

Cable connector	4-pin M8 (IEC 60947-5-2)
-----------------	--------------------------

Weight

probe	17 g
probe with 0.3 m cable	28 g

Options and Accessories

Sensor protection

plastic grid	DRW010522SP
membrane filter	DRW010525SP
stainless steel sintered filter	HM46670SP

4 ... 20 mA loop power converter	UI-CONVERTER-1CB
----------------------------------	------------------

Mounting bracket for converter	225979
--------------------------------	--------

Plastic M12 installation nuts, pair	18350SP
-------------------------------------	---------

USB cable for PC connection	219690
-----------------------------	--------

Probe mounting clamp set, 10 pcs	226067
----------------------------------	--------


Probe mounting flange	226061
-----------------------	--------

Connection cables

standard 0.3 m	HMP50Z032SP
standard 3 m	HMP50Z300SP
80 °C 1.5 m	225777SP
80 °C 3 m	225229SP
180 °C 3 m FEP	226902SP

Dimensions

Dimensions in mm (inches)

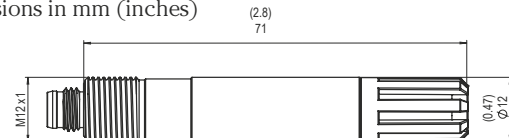

VAISALA

www.vaisala.com

Please contact us at
www.vaisala.com/requestinfo



Scan the code for more information

Ref. B210852EN-E ©Vaisala 2013

This material is subject to copyright protection, with all copyrights retained by Vaisala and its individual partners. All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. The reproduction, transfer, distribution or storage of information contained in this brochure in any form without the prior written consent of Vaisala is strictly prohibited. All specifications – technical included – are subject to change without notice.

